

Every clay tile has its own unique tone, which means that roofs are never monochrome in appearance. The roofer, who knows the tricks of the trade, will be able to mix the tiles to obtain a harmonious effect.



NF is the French quality seal for European Standard NF-EN 1304, which covers appearance, shape, dimensions, mechanical strength, watertightness (class 1) and frost resistance (type C).
 AFNOR Certification - 11, av. Francis de Pressensé - 93571 St-Denis La Plaine Cedex - France - www.marque-nf.com
 The installation of the Résidence tile must comply with standard NF P 31-202 in force (reference DTU 40.21), whose main points are highlighted as per below.
 Silicone coated tile.



Colour: rustic brown

EXTRACT FROM THE MANUFACTURER'S RECOMMENDATIONS

Minimum pitch according to climatic regions

Location		Without underlay (%)	With underlay (%)
Area 1*	Protected	35 / 19.29	30 / 16.70
	Normal	40 / 21.80	35 / 19.29
	Exposed	60 / 31.00	50 / 26.57
Area 2*	Protected	35 / 19.29	30 / 16.70
	Normal	50 / 26.57	45 / 24.23
	Exposed	70 / 35.00	60 / 31.00
Area 3*	Protected	50 / 26.57	45 / 24.23
	Normal	60 / 31.00	50 / 26.57
	Exposed	80 / 38.66	70 / 35.00

*Area 1: over 40 km inland and less than 200 m above sea level - Area 2: 20 to 40 km from the coast and/or located at 200 to 500 m above sea level - Area 3: under 20 km from the coast and located at over 500 m above sea level. This minimum pitch table has been designed for temperate and warmer climatic conditions, upto an elevation of 900 m. You may follow different instructions in other climatic areas. Please contact your local distributor for further advice.


Number of ventilation tiles per sq. m. of projected area

Type of insulation	with underlay	without underlay
Fitted to the floor (of the attic)	1/15	1/15
Under the covering	1/15	1/9

Effective ventilation area per ventilation tile: 30 cm²

Underlay

Under no circumstances can the underlay be fixed directly under the battens, as it is essential to ensure adequate circulation of air between the underlay and the underside of the tiles (as well as between the flexible underlay and the insulation materials).

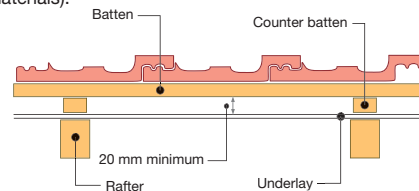

For all questions relating to local regulations, please contact your distributor.

Stamp

Terreal
Terreal Export Department
 Route Nationale - 16270 Roumazières-Loubert - France
 Tel: +33 545 718 132/133
 Fax: +33 545 718 282
 export.terreal@terreal.com
www.terreal.com

D'Arvy Corporate - 03/2003 - Non-contractual photos - Terreal reserves the right to modify the technical specifications of its products - Réf.: FA108

RÉSIDENCE


TBF

ROOF TILES AND WALL CLADDINGS

TERREAL


TERRACOTTA

NORTHERN FORMAT TILE

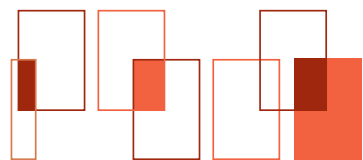

Northern format tile

RÉSIDENCE TBF



COMMON ACCESSORIES with other Northern format tiles

Ridges

- La Flamande ridge end (4 per m.)
- Vertical ridge end (pediment)
- Résidence ridge end (pediment)
- Monopitch tile
- Left monopitch end tile

- Right monopitch end tile

Ridge and hip

- Résidence ridge tile (2.5 per m.)
- Résidence hip end
- Brittany-style ridge tile
- La Flamande ridge tile

- Résidence L or T shaped ridge

General accessories

- Résidence hip tile (3 per m.)
- Résidence 3-way finial holder
- Résidence 4-way finial holder

- Lead and zinc closure (PROFIMO type)

Other accessory

- Nailing hook

COLOURS



Natural red



Northern brown



Plum red



Rustic brown



Graphite black





Dark pink multi



Colour: Northern brown

SPECIFIC ACCESSORIES Résidence

Dimensions are in mm.

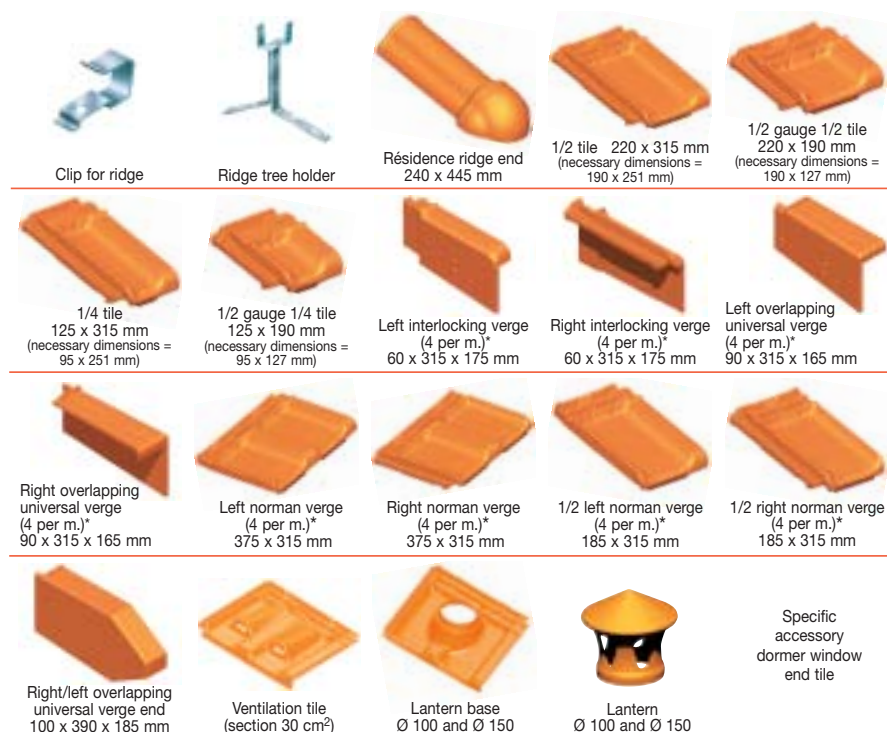

Colour: rustic brown

* Beware ! The right/left verge definition has been changed for the TBF range. Today, the right/left distinction is done watching the roof from the ground, in front of the main pitch.



Colour: rustic brown



Natural red

The Résidence TBF tile has all the charm of a small format tile and the obvious advantages of a large format one. Its innovative visual principle of "two tiles in one" makes exceptionally light weight roofs possible. The Résidence tile is easy to install and has been designed for securing tiles without mortar, both aesthetically and technically. It should be laid with staggered joints, thus providing excellent waterproofing. It can fit to any landscape thanks to its wide colour range, and develops a discrete patina with time.

Proven weathertightness

With its deep broad upper interlocking, the Résidence is extremely stable and perfectly weathertight. Its central ridge and staggered-joint fixing further enhance these qualities by making the water run off away from the interlocks.

Two short tiles in one

With its double-tile appearance and a wide palette of shades, the Résidence tile provides the rich visual effect of small format tiles. Meanwhile, being a large 10 per sq. m. format tile, it ensures lightness and economy for the roof.

Northern format tile - Double interlocking and double lap								
Dimensions overall (in mm)	Weight per tile (in kg)	Number of tiles per pallet	Gauge (in mm)	Cover width (in mm)	Tiles per sq. m.	Batten (in m. per sq. m.)	Weight per sq. m. (in kg)	Laid
412 x 311	3.8	210(R)/240(C)	251	383	10	4	40	Broken bond

1 mm = 0.03937 inches - 1 square metre = 10.764 square feet - 1 kg = 2.2046 lbs.
(R) = pallets for road delivery (mainland Europe).
(C) = pallets for containers (overseas).

